



UNWIND CHART AND ROLL HANDLING


**Stand-up bag, pouch or pillow
(fills through the top)**

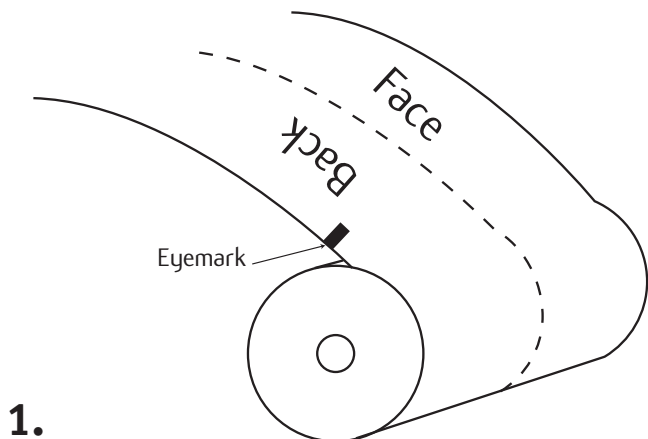


**Stand-up bag, pouch or pillow
(fills through the top)**

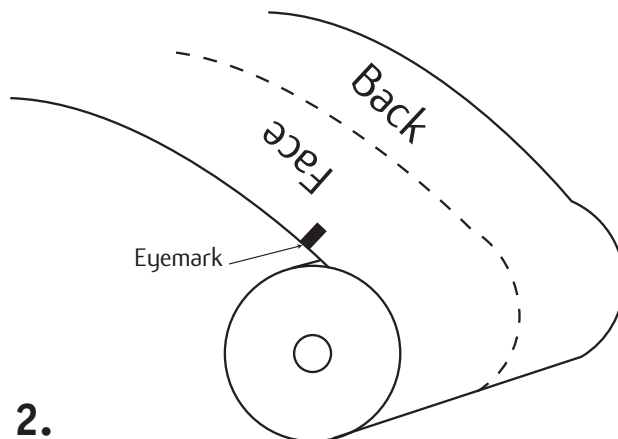

TE – Tamper evident bag or pouch

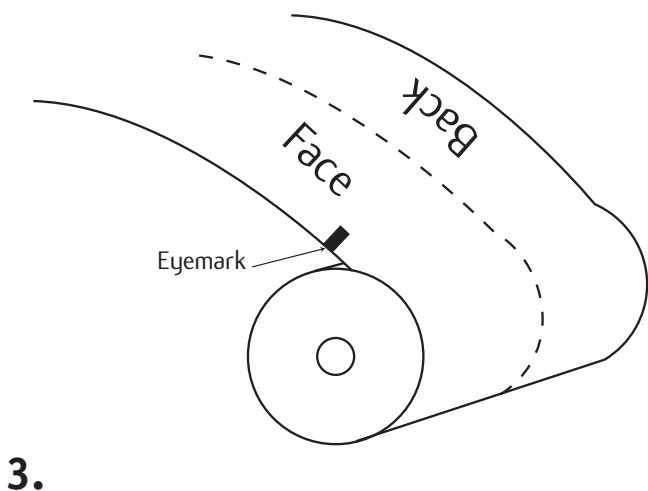

TE – Tamper evident bag or pouch

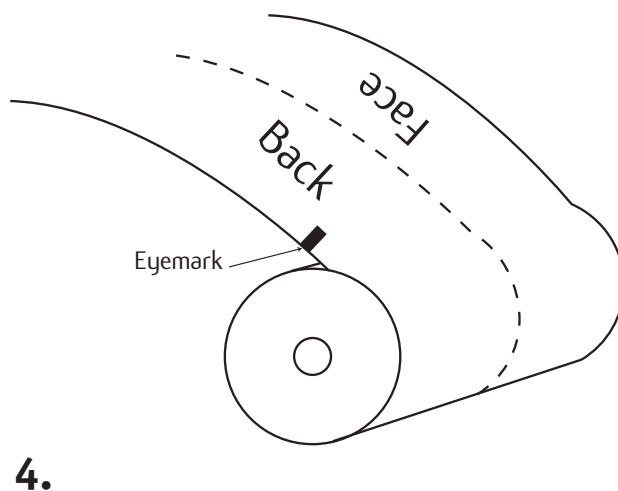

- No micro-dots, logo's, or markings of any kind may be in the eye mark track area.
- Consult with Atlapac before you send in printed film. Written approval is required.
- Rolls need to have flush cores or a handling fee per roll may apply.
- Maximum outer dimension of material to be 23.5" (600mm) to fit into machine.
- Splices must be 2 or less per roll. Splice tape (colored) needs to be in the middle of the impression
- Rolls need to be pallet packed with roll guards – no pyramids.
- Sealant wound in or a #2. High slip sealant web (COF .2-.3 prefer closer to .2)

If possible, please provide an additional roll of "set up" film @ approx. 20"- 23.5" OD from print/laminate start up. This additional film will be utilized during set up only and will help keep your scrap rate at a minimum. This "set up" material will be disposed of upon completion of run.



How can we help?

2901 East Fourth Avenue
Columbus, Ohio 43219
614.252.2121
800.888.7019 toll-free
614.252.7289 fax
www.atlapac.com